


		INCH	MM
CROWN WHEEL BOLT PCD	D1	5.276	134.0
No. OF BOLTS		10	10
THREAD / THRO' HOLE		0.413	10.5
CROWN WHEEL SPIGOT DIA	D2	4.2522	108.0
BEARING DIA	D3	1.575	40.0
BEARING DISTANCE	L1	4.426	112.42
SPIGOT LENGTH	L2	0.792	20.11
	L2/A	0.790	20.07
OVERALL LENGTH	L3	6.008	152.6
BEARING/CROWN WHEEL	L4	0.826	21.0
BORE	D4	1.1842	30.0
DRIVE SHAFT SPLINE:-			
No. OF TEETH		28	
PITCH		1 MOD	
TYPE			
PRESSURE ANGLE		45 DEG	

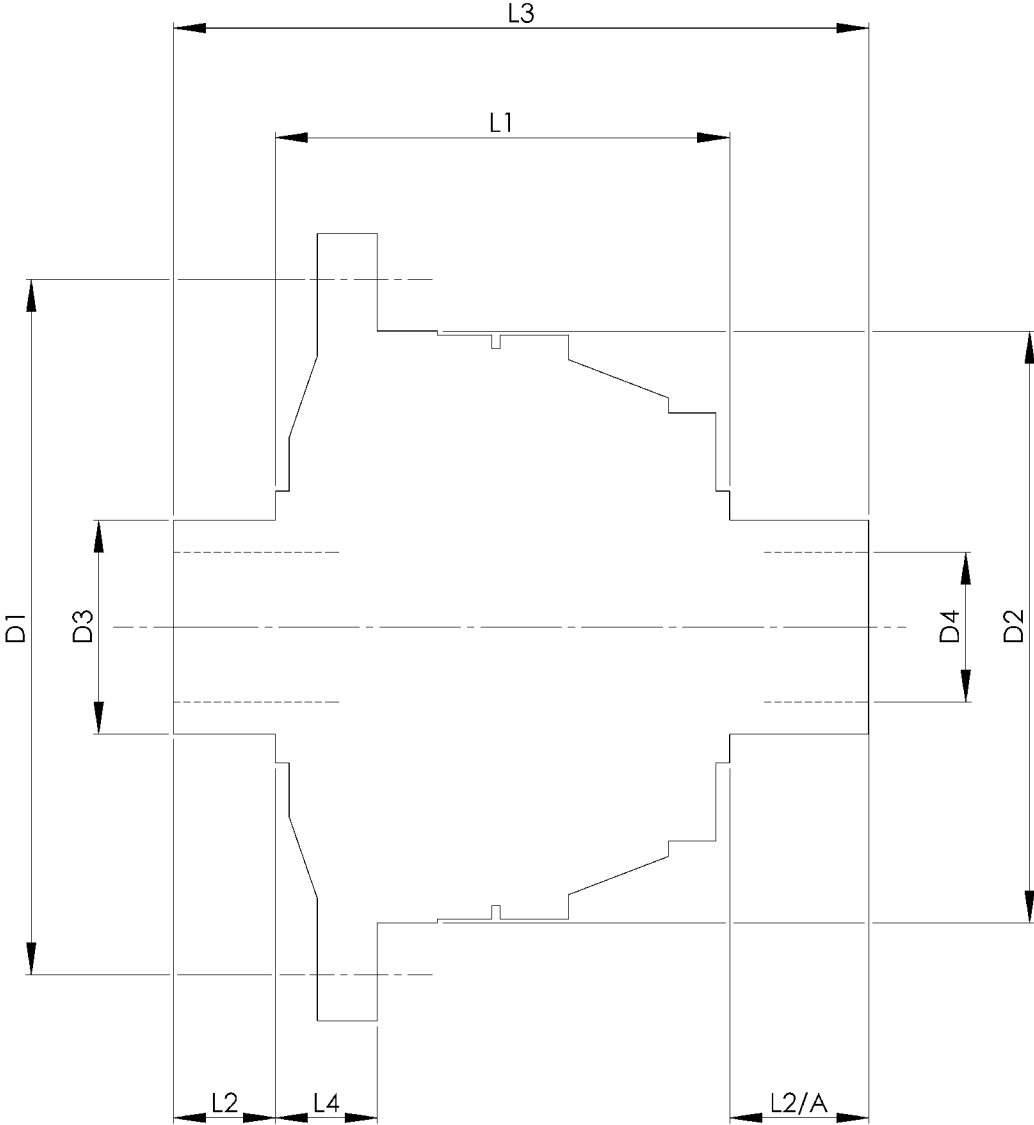

TITLE F.W.D. DIFF DATA SHEET.
SCALE 1:1 U.O.S. SHEET 1 OF 1
Drg. No. QDF14U

Quaife Design & Development.

IF IN DOUBT, ASK.

THIS DRAWING OF DESIGN IS STRICTLY
CONFIDENTIAL & THE COPYRIGHT THEREIN
THE EXCLUSIVE PROPERTY OF
QUAIFE DESIGN & DEVELOPMENT LTD.
AND MAY NOT BE USED, COPIED OR REPRODUCED
WITHOUT THE WRITTEN PERMISSION.

FINISH. MACH,	GRIND@G
LIMITS. FRACT. $\pm 1/64"$.	
DEC. $\pm 0.005"$.	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 30.1.06	
DRAWN BY. M.L.M.	
Used In.	HONDA SYNTHESIS