


CROWN WHEEL BOLT PCD D1
 No. OF BOLTS
 THREAD / THRO' HOLE
 CROWN WHEEL SPIGOT DIA D2
 BEARING DIA D3
 BEARING DISTANCE L1
 SPIGOT LENGTH L2
 L2/A
 OVERALL LENGTH L3
 BEARING/CROWN WHEEL L4
 BORE D4

	INCH	MM
D1		
D2	4.927	125.1
D3	1.4966	38.3
L1	3.728	94.7
L2	0.680	17.3
L2/A	1.617	41.1
L3	6.025	153.0
L4	1.071	27.2
D4	1.0254	26.0

DRIVE SHAFT SPLINE:-

No. OF TEETH
 PITCH
 TYPE
 PRESSURE ANGLE

22
24/48 DP
FILLET ROOT SIDE FIT
45 DEG

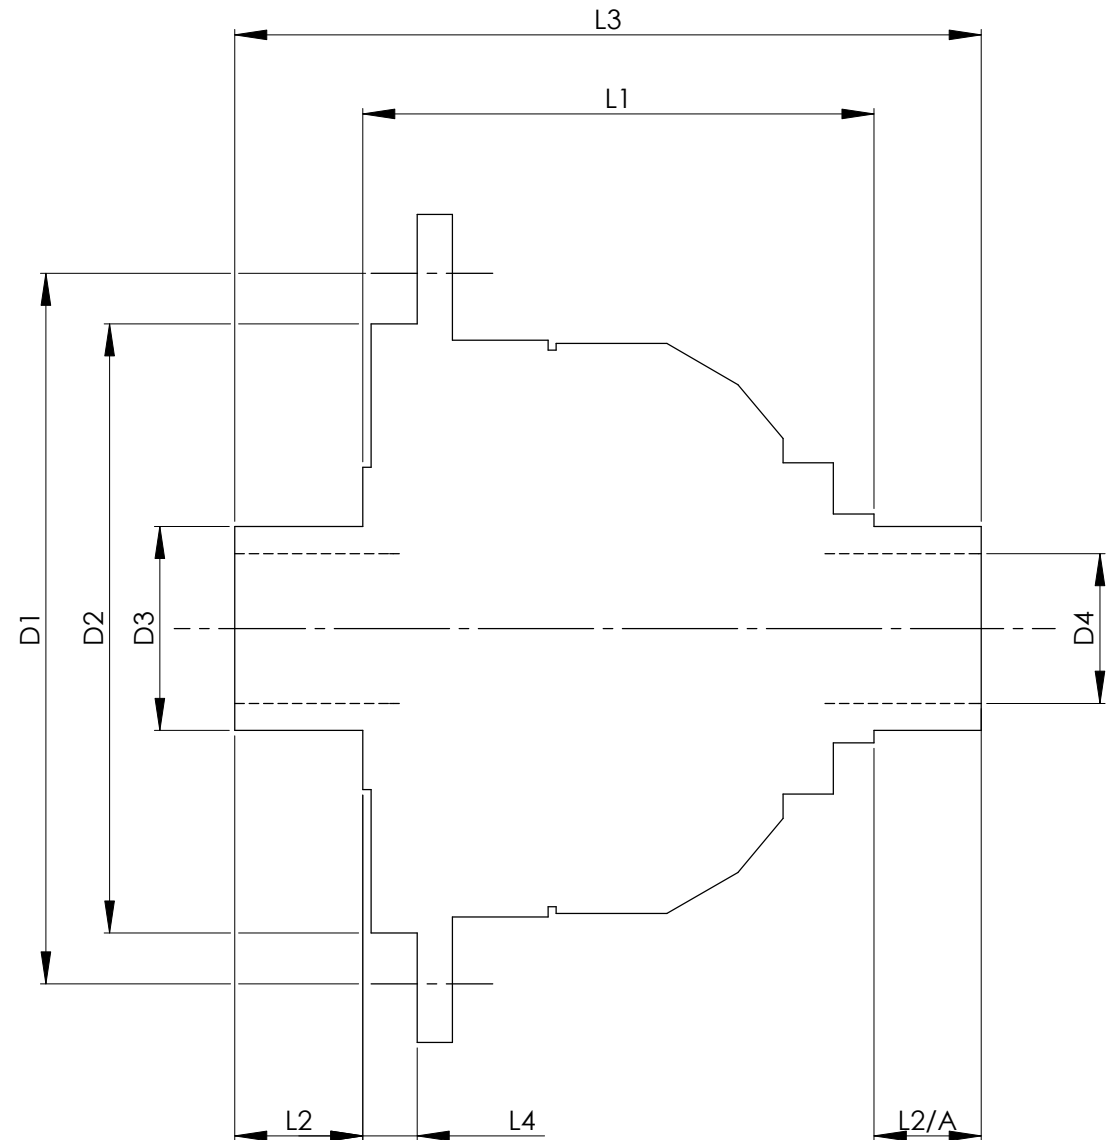

TITLE F.W.D. DIFF DATA SHEET.

SCALE 1:1 U.O.S. SHEET 1 OF 1

Drg. No. QDF9H

IF IN DOUBT, ASK.

Quaife Design & Development.

THIS DRAWING OR DESIGN IS STRICTLY CONFIDENTIAL & THE COPYRIGHT THEREIN IS THE EXCLUSIVE PROPERTY OF R.T. QUAIPE ENGINEERING LTD. AND MAY NOT BE USED COPIED OR EXHIBITED WITHOUT THEIR WRITTEN PERMISSION.

FINISH. MACH.	GRIND@G
LIMITS. FRACT. ± 1/64"	
DEC. ± 0.005"	
MATERIAL.	
TREATMENT.	
ISSUE. 01 DATE. 17.5.05	
DRAWN BY. M.L.M.	

Used In. PEUGEOT 106/205 (MA G/BOX)
 CITREON AX (MA G/BOX)